



Product Catalogue

Guangdong Carson Power Industrial Co., Ltd

Website: www.gdstarter.com

Email: carson2@gdstarter.com

AUTOMECHANIKASHANGHAI

5.1D85



Car Jump Starter with air pump



Battery capacity: **6,000-12,000mAh**

Item dimension: 207x110x57mm

Starting voltage: 12V

Starting current: 300-600A

Peak current: 600-1,200A

LED light: 3 modes with SOS

Type C Input: 15V= 3A、12V= 3A、9V= 3A、
5V= 3A

USB output: 5V= 2A(Max) * **2 ports**

Built-in air compressor: **15V/22mm**

Max inflation pressure: **150PSI**

Operating temperature: -20°C~+60°C



Battery capacity: **6,000-12,000mAh**

Item dimension: 190x130x55mm

Starting voltage: 12V

Starting current: 300-600A

Peak current: 600-1,200A

LED light: 3 modes with SOS

Type-C input: 5V= 2A

USB output: 5V= 2A(Max)

Built-in air compressor: **15V/22mm**

Max inflation pressure: **150PSI**

Operating temperature: -20°C~+60°C



Battery capacity: **6,000-12,000mAh**

Item dimension: 210*120*55mm

Starting voltage: 12V

Starting current: 300-600A

Peak current: 600-1,200A

LED light: 3 modes with SOS

Type-C input: 5V= 2A

USB output: 5V= 2A(Max)

Built-in air compressor: **15V/19mm**

Max inflation pressure: **150PSI**

Operating temperature: -20°C~+60°C



Battery capacity: **6,000-12,000mAh**

Item dimension: 210x110x52mm

Starting voltage: 12V

Starting current: 300-500A

Peak current: 600-1,000A

LED light: 3 modes with SOS

Type-C input: 5V= 2A

USB output: 5V= 2A(Max)

Built-in air compressor: **15V/19mm**

Max inflation pressure: **150PSI**

Operating temperature: -20°C~+60°C

Car Jump Starter


with NO air pump




Battery capacity: **6,000-12,000mAh**
Item dimension: 175x86x40mm
Starting voltage: 12V
Starting current: 300-600A
Peak current: 600-1,200A
LED light: 3 modes with SOS
Type-C input: 5V= 2A
USB output: 5V= 2A(Max)
Operating temperature: -20°C~+60°C



Battery capacity: **6,000-10,000mAh**
Item dimension: 175x86x40mm
Starting voltage: 12V
Starting current: 300-500A
Peak current: 600-1,000A
LED light: 3 modes with SOS
Type-C input: 5V= 2A
USB output: 5V= 2A(Max)
Operating temperature: -20°C~+60°C

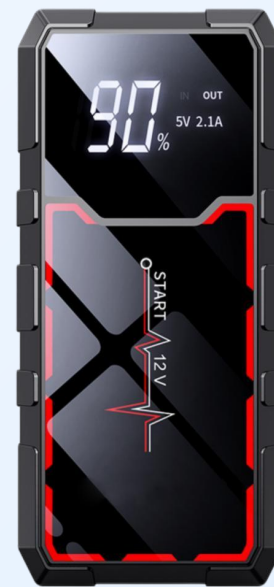

Battery capacity: **6,000-12,000mAh**
Item dimension: 185x84x44mm
Starting voltage: 12V
Starting current: 300-600A
Peak current: 600-1,200A
LED light: 3 modes with SOS
Type-C input: 5V= 2A
USB output: 5V= 2A(Max)
Operating temperature: -20°C~+60°C

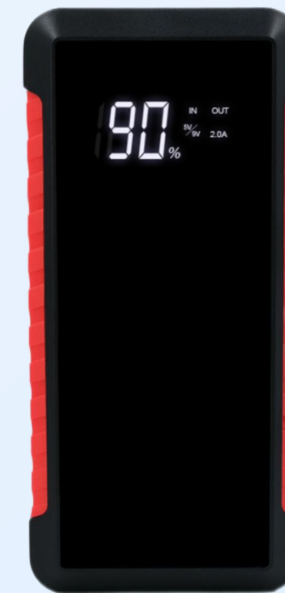

Battery capacity: **6,000-12,000mAh**
Item dimension: 185x87x43mm
Starting voltage: 12V
Starting current: 300-600A
Peak current: 600-1,200A
LED light: 3 modes with SOS
Type-C input: 5V= 2A
USB output: 5V= 2A(Max)
Operating temperature: -20°C~+60°C

Car Jump Starter



Battery capacity: **6,000-10,000mAh**
Item dimension: 175x85x40mm
Starting voltage: 12V
Starting current: 300-500A
Peak current: 600-1,000A
LED light: 3 modes with SOS
Type-C input: 5V= 2A
USB output: 5V= 2A(Max)
Operating temperature: -20°C~+60°C



Battery capacity: **6,000-12,000mAh**
Item dimension: 185x88x45mm
Starting voltage: 12V
Starting current: 300-600A
Peak current: 600-1,200A
LED light: 3 modes with SOS
Type C Input: 5V= 2A, 9V= 2A
USB Output 1: 5V= 2A(Max)
USB Output 2: 5V= 3A(Max),
9V= 2A(Max), 12V= 1.5A(Max)
Operating temperature: -20°C~+60°C



Battery capacity: **6,000-12,000mAh**
Item dimension: 185x88x45mm
Starting voltage: 12V
Starting current: 300-600A
Peak current: 600-1,200A
LED light: 3 modes with SOS
Type C Input: 5V= 2A, 9V= 2A
USB Output 1: 5V= 2A(Max)
USB Output 2: 5V= 3A(Max),
9V= 2A(Max), 12V= 1.5A(Max)
Operating temperature: -20°C~+60°C

Car Jump Starter



Battery capacity: **6,000-10,000mAh**
Item dimension: 175x85x35mm
Starting voltage: 12V
Starting current: 300-500A
Peak current: 600-1,000A
LED light: 3 modes with SOS
Type-C input: 5V= 2A
USB output: 5V= 2A(Max)
Operating temperature: -20°C~+60°C



Battery capacity: **6,000-10,000mAh**
Item dimension: 175x85x35mm
Starting voltage: 12V
Starting current: 300-500A
Peak current: 600-1,000A
LED light: 3 modes with SOS
Type-C input: 5V= 2A
USB output: 5V= 2A(Max)
Operating temperature: -20°C~+60°C



Battery capacity: **6,000-12,000mAh**
Item dimension: 185x85x45mm
Starting voltage: 12V
Starting current: 300-600A
Peak current: 600-1,200A
LED light: 3 modes with SOS
Type-C input: 5V= 2A
USB output: 5V= 2A(Max)
Operating temperature: -20°C~+60°C

(These three are the models we produce for GOODYEAR.)

Potable Air Compressor



Battery capacity: **4,000mAh**

Item dimension: 158x76x55mm

Color: Black

Motor power: 58W / Product power: 30 watts

Maximum Air Pressure: 150PSI \pm 5PSI

Airflow rate: 17L/min \pm 10%

Type-C input: 5V $\overline{=}$ 2A

LED light: 3 modes LED flashing light with SOS

Operating temperature: -20°C~+60°C

Jump Starter

for 12V minivan & 24V heavy truck




Battery capacity: **20,000mAh**
Item dimension: 230x224x70mm
Starting voltage: 12V
Starting current: 1,000A
Peak current: 2,000A
LED light: 3 modes LED flashing light with SOS
Type-C input: 5V= 2A / 9V= 2A
USB output: 5V= 3A(Max)
Operating temperature: -20°C~+60°C



Battery capacity: **43,400mAh**
Item dimension: 257*210*144mm
Starting voltage: 12V / 24V
Starting current: 12V/1,000A, 24V/2,100A
Peak current: 12V/2,100A, 24V/4,200A
LED light: 3 modes LED flashing light with SOS
USB output: 5V= 2A(Max)
AC charger: 12.6V/2A * 2
DC output: 14.8V= 3A
Operating temperature: -20°C~+60°C

ALL IN 1 JUMP STARTER

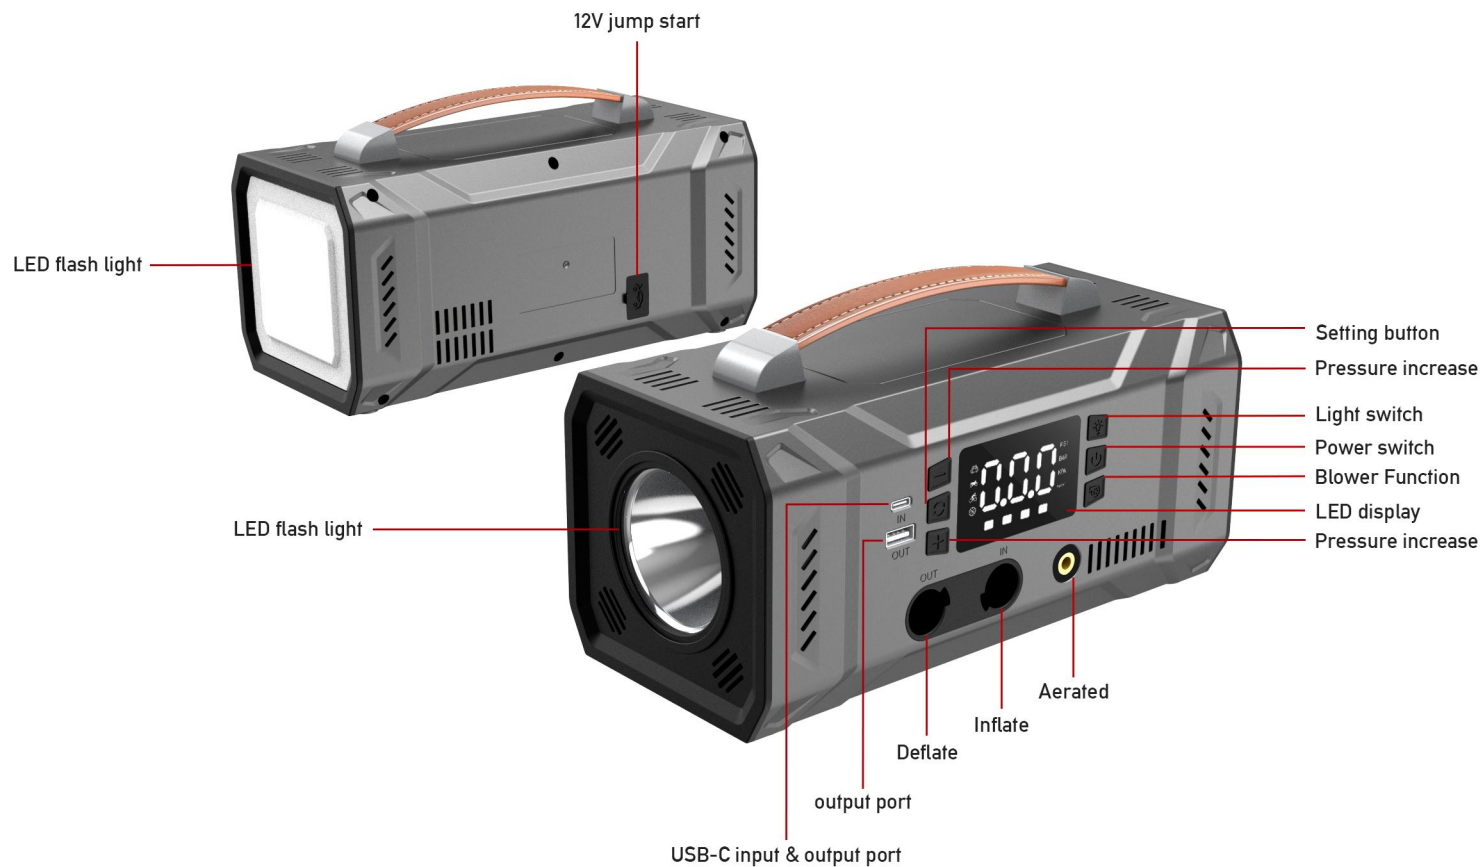

All in one jump starter with blower function

Battery capacity: 16,000mAh / 24,000mAh

Item dimension: 244x166x138mm

Color: Dark grey

USB Output: 5V= 3A, 9V= 3A, 12V= 1.5A

Type-C Input:

45W(15V= 3A, 12V= 3A, 9V= 3A, 5V= 3A)

Built-In Air Compressor: 15V/22mm

Max Inflation Pressure: 150PSI

Air Flow Volume: Inflate/Deflate: 26L/min

2 LED lights: 1. LED Spotlight; 2. LED Wide-Area Lamp.

Fully charging time: About 4H

Operating temperature: -20°C~+60°C


NEW FAMILY DESIGN



JUMP STARTER WITH AIR PUMP + JUMP STARTER + POTABLE AIR PUMP
Delivery time need 65 days

CARSSON POWER

Accessories

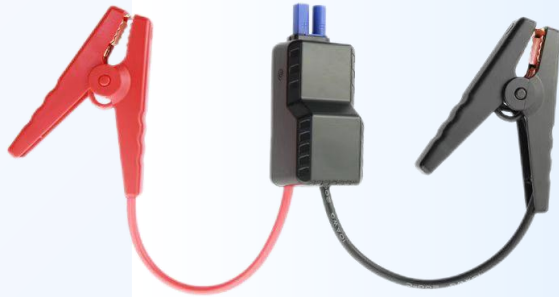

Smart Jumper Cable



USB Cable



Instrucion Munual



Air Hose



Inflatable Nozzle



Nylon Zipper Bag

Certificates



BSCI

Monitoring summary report for Guangdong Carson Power Industrial Co., Ltd
MONITORING ID: 24-0290605



Monitored Party Guangdong Carson Power Industrial Co., Ltd	amfori ID 156-058909-000	Address Room 501, Building 13, Area 1 of Wanyang Science and Innovation Park, No. 1 Huangchong Industrial Avenue, Beijiao Town, Shunde District, Foshan, Guangdong Sheng, China
Monitoring Activity amfori Social Audit - Manufacturing	Monitoring Type Full Monitoring	Monitoring Partner TÜV SÜD
Monitoring Start Date 13/11/2024	Closing Meeting Finished Date 14/11/2024	Submission Date 19/11/2024
Expiration Date 19/11/2025	Announcement Type Semi Announced	
Site Guangdong Carson Power Industrial Co., Ltd	Site amfori ID 156-058909-001	

This is an extract of the online Monitoring Result, generated on 19/11/2024, and is only valid as an acknowledgement of the result. To see all the details, review the full monitoring result, which is available on the [amfori Sustainability Platform](#) - The English version is the legally binding one.

amfori does not assume any liability with regard to the compliance of this extract, or any versions of this extract, with the Regulation (EU) 2016/679 (General Data Protection Regulation).

All rights reserved. No part of this publication may be reproduced, translated, stored in a retrieval system, or transmitted, in any form or by any means electronic, mechanical, photocopying, recording or otherwise, be lent, re-sold, hired out or otherwise circulated without the amfori consent. © amfori, 2021

OVERALL RATING



SECTION RATING

PA1: Social Management System	C	
PA 2: Workers Involvement and Protection	A	
PA 3: The Rights of Freedom of Association and Collective Bargaining	A	
PA 4: No Discrimination, Violence or Harassment	A	

ISO14001



CERTIFICATE

The Certification Body
of TÜV SÜD Asia Pacific TÜV SÜD Group

certifies that

Guangdong Carson Power Industrial Co., Ltd
3rd Floor, 5th Floor, 11th Floor, Building 13, Zone 1,
Wanyang Kechuang Park, No.1 Huangchong Industrial Avenue,
Huanglong Village, Beijiao Town, Shunde District
Foshan City, Guangdong Province, P. R. China
Post Code: 528300

has established and applies
an Environmental Management System for

Manufacturing of Emergency Power Supply and Inflation Pump

An audit was performed, Report No. **7484278014**.

Proof has been furnished that the requirements according to

ISO 14001:2015

are fulfilled. The certificate is valid from 2024-12-24 until **2027-12-23**.

Date of Initial Certification: 2024-12-24

Certificate Registration No.: TUV104 04 5228

2024-12-24

Jan-Peter Seo
Certification Body
of TÜV SÜD Asia Pacific
TÜV SÜD Group



Accreditation by the Joint Accreditation System
of ANZSIS and the JAS-ANZ, Ltd.
www.jas-anz.org/762088

TÜV SÜD Korea Ltd. • 2/F, Two FC, 10 Gollangmunmye-ro, Yeongdeungpo-gu • Seoul, 07200 • Korea




ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ СЕРТИФИКАТ ◆ CERTIFICADO ◆ CERTIFICAT



Guangdong Carson Power Industrial Co., Ltd

- Location: Rm501, Bldg13, Zone1, Wanyang Kechuang Park, No.1 Huangchong Ind Ave, Huanglong, Beijiao, Shunde, Foshan, Guangdong, China
- Website: www.gdstarter.com
- E-mail address(Mia): carson2@gdstarter.com

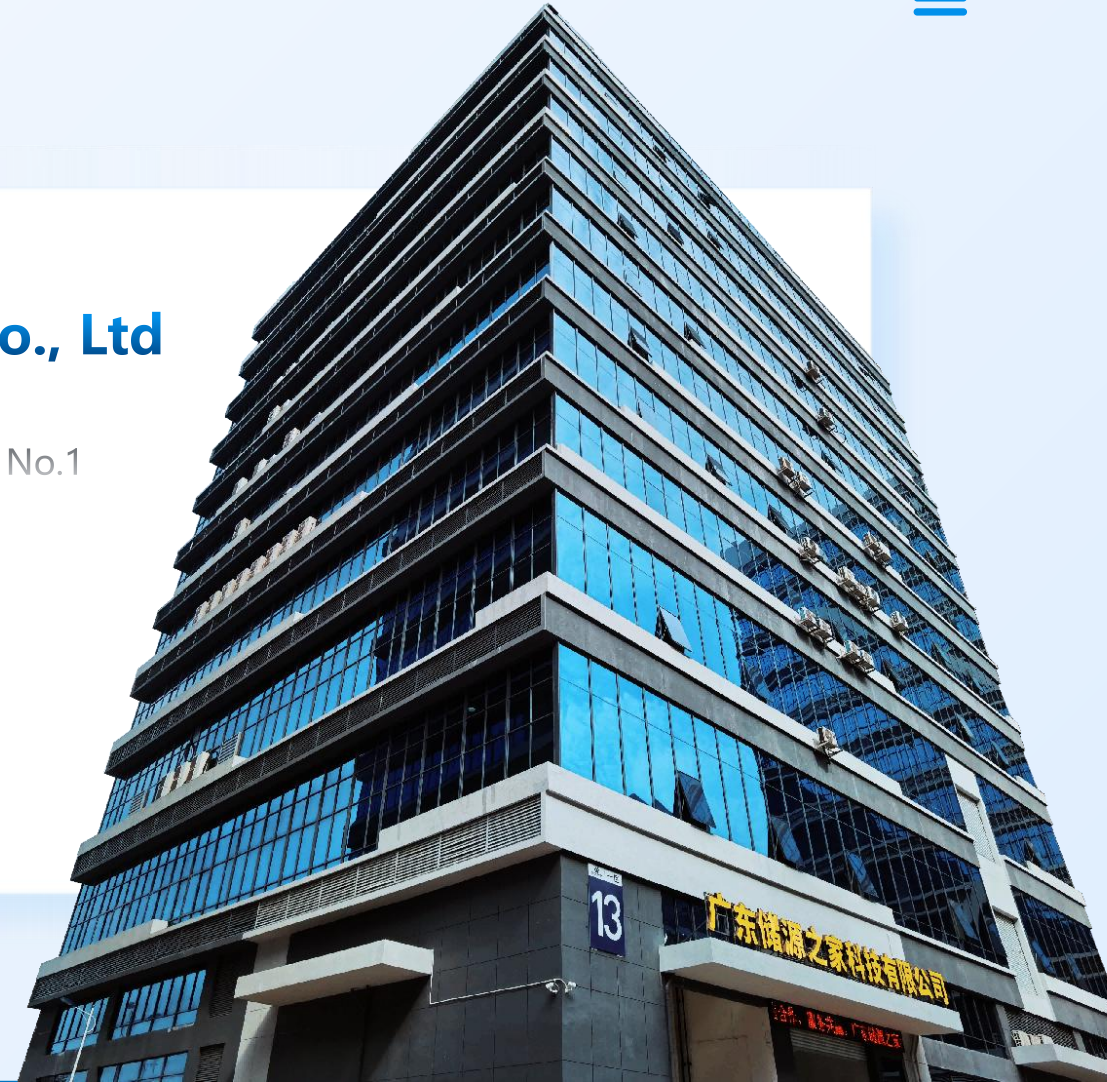

T H A N K Y O U F O R W A T C H I N G !